
AJ Eklipta



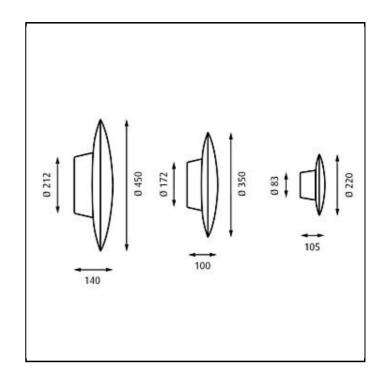

Design Arne Jacobsen

The fixture emits soft comfortable light. The glass is designed to provide a uniformly lit surface. The three-layer mouth-blown opal glass shade has a transparent edge, providing a decorative halo of light around the fixture. Concept

Finish White, powder coated. White opal glass.

Ceiling/Wall box: Die cast aluminium or spun aluminium. Diffuser: Mouth-blown white opal glass. Material

Terminal block: Ø 220/Ø 350: 3x2,5mm², Ø 450: 5x2,5mm². Looping: Approved, Ø 220/Ø 350mm: Max. 3x1,5mm², Ø 450: Max. 5x1,5mm². Ballast positioning: In Mounting

ceiling/wall box.

Weight Max. 4kg.

Class Ingress protection, Ceiling: IP20, Wall: IP44 (Ø 220; Ceiling: IP20, Wall: IP21). LED ceiling/ wall: IP20. Electric shock protection I w. ground.

Product Code	Dimensions	Light source	Finish	Shield/Diffuser	Body	Mounting	Lighting control
AJE-WC	Ø 220	13W LED 3000K	WHT	WHT OPAL	BOX W/O SIDE CABLE HOLES	WALL & CEILING	DALI
	Ø 350	13W LED 4000K			BOX W/SIDE CABLE HOLES		DIM 1-10V
	Ø 450	1x18W TC-TEL GX24q-2 HF					EMERG LIGHT 3 H
		1x40W QT ax-14 G9					LEADING EDGE
		27W LED 3000K					NONE
		27W LED 4000K					
		2x18W TC-TEL GX24q-2 HF					
		9W LED 2700K					
		9W LED 3000K					

Specification notes

. AdW QT G9 only available for Ø 220. 60W E27 and 1x18W TC-TEL only available for Ø 350. 100W E27, 2x18W TC-TEL and 2x26W TC-TEL only available for Ø 450. Emergency light only available with 18W TC-TEL Ø220 only available with wall & ceiling.

Info notes

Only wall mounted versions for outdoor use. Ø 220 is for indoor use only. Emergency versions not suitable for amalgam light sources. Ceiling mounted variants are delivered without side cable holes. Wall mounted variants is delivered with side cable holes. The variant for wall & ceiling is only available with IP20. Eading edge dimmer on Ø220 LED variants is 100W Triac dimmer. For LED fixtures without glass, please contact the sales office. Find energysaving alternative light sources on www.louispoulsen.com.

