




### Scotty adjustable LED disc 1200lm GE

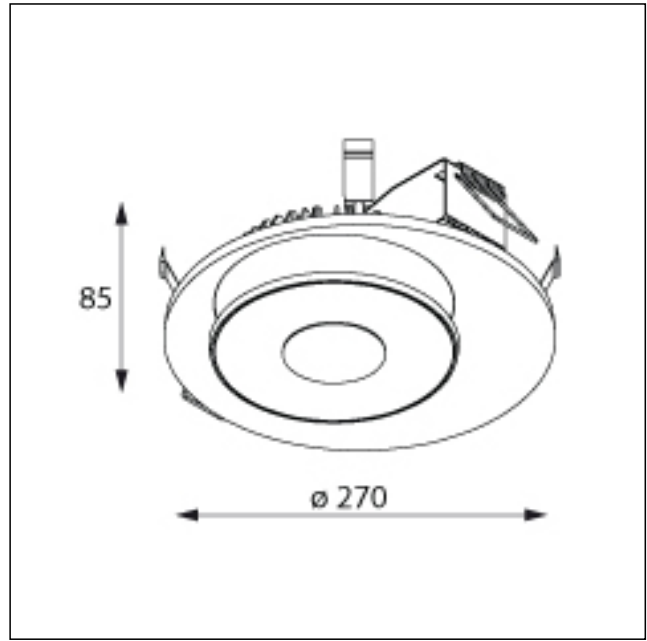

PRODUCT DATA	
Gear / transfo	LED gear not incl.
Adjustability	h 360° v 60°
Aperture	ø 288 h 90 (trimless) / ø 258 h 80 non-trimless)
Weight	2.00 kg
Voltage	0
Min. distance	0.1m
IP	IP20
Glow wire test	960 °C
Remark	! 11799830 LED gear 80V/45W max. 700mA ! 11799930 LED gear Dali/Pushdim 80V/45W max. 700mA

	WARM WHITE		NEUTRAL WHITE	
	MEDIUM	FLOOD	MEDIUM	FLOOD
<b>white struc</b>	11793009	11793109	11793209	11793309
<b>black struc</b>	11793032	11793132	11793232	11793332



\*conditions - see website



## Scotty adjustable LED disc 1200lm GE medium white struc

LIGHTING PERFORMANCE		
	WARM WHITE	NEUTRAL WHITE
Source quantity	1	1
Source type	LED disc	LED disc
Colour temperature	3000K	4000K
Luminaire flux	969 Lm	1107 Lm
Power consumption	25.5 W	25.5 W
Luminaire efficacy	100 Lm/W	100 Lm/W
CRI	80	75
Beam angle	32°	32°
Source lifetime	50000 hrs	50000 hrs
Type connection	-	-



**Scotty** adjustable LED disc 1200lm GE medium white struc flood white struc

LIGHTING PERFORMANCE		
	WARM WHITE	NEUTRAL WHITE
Source quantity	1	1
Source type	LED disc	LED disc
Colour temperature	3000K	4000K
Luminaire flux	949 Lm	1090 Lm
Power consumption	25.5 W	25.5 W
Luminaire efficacy	100 Lm/W	100 Lm/W
CRI	80	75
Beam angle	56°	56°
Source lifetime	50000 hrs	50000 hrs
Type connection	-	-