




Soufflé suspension poly down ø500 Fluo GI

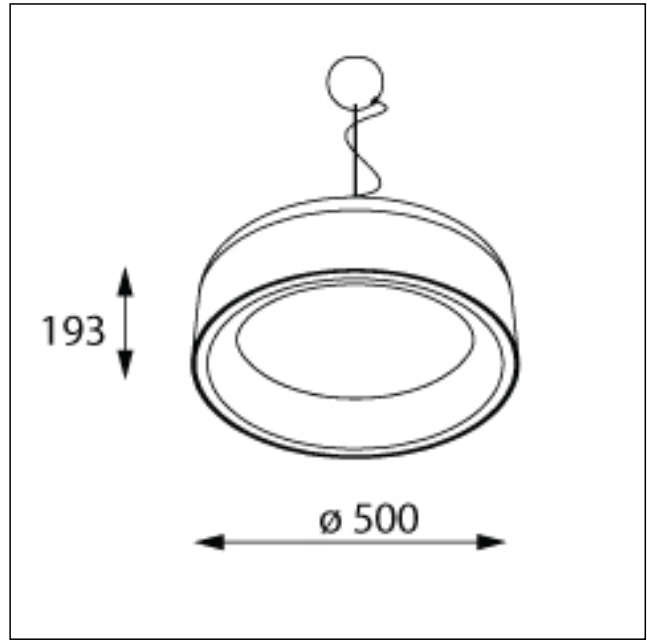

PRODUCT DATA	
Gear / transfo	gear incl., electronic
Adjustability	0
Aperture	not applicable
Weight	7.5 kg
Voltage	0
Min. distance	0.5
IP	IP20
Glow wire test	0
Remark	! textile woven power feed cable optional - see accessories

	NOT DIMMABLE	1-10V	DALI/PUSHDIM
shiny white (white struc interior)	11810249	11815249	11817249
shiny black (white struc interior)	11810251	11815251	11817251





Soufflé suspension poly down ø500 Fluo GI shiny white (white struc interior)

LIGHTING PERFORMANCE	
Source quantity	1
Source type	2Gx13(T16-R)
Colour temperature	-
Luminaire flux	-
Power consumption	40 W
Luminaire efficacy	-
CRI	-
Beam angle	-
Source lifetime	-
Type connection	-