




United 4x 14/24W GI

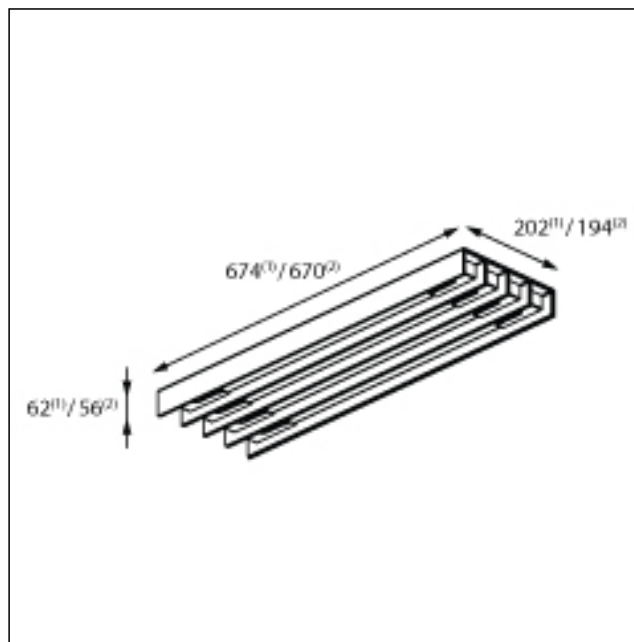

PRODUCT DATA

| | |
|----------------|---|
| Gear / transfo | gear incl., electronic |
| Adjustability | 0 |
| Aperture | not applicable |
| Weight | 5 kg |
| Voltage | 0 |
| Min. distance | 0,5 m |
| IP | IP 20 |
| Glow wire test | 0 |
| Remark | ! suspension kit optional - see accessoires |

| | NOT DIMMABLE | DALI/PUSHDIM | 1-10V |
|---|--------------|--------------|----------|
| black struc (white struc interior) | 11800647 | 11800747 | 11805347 |
| black struc (black interior) | 11800648 | 11800748 | 11805348 |
| white struc (white struc interior) | 11800609 | 11800709 | 11805309 |
| white struc (black interior) | 11800629 | 11800729 | 11805329 |





United 4x 14/24W GI black struc (white struc interior)

| LIGHTING PERFORMANCE | |
|----------------------|---------|
| Source quantity | 4 |
| Source type | T16 SLS |
| Colour temperature | - |
| Luminaire flux | - |
| Power consumption | 14/24 W |
| Luminaire efficacy | - |
| CRI | - |
| Beam angle | - |
| Source lifetime | - |
| Type connection | - |