


DOWNUT 350 TL5C GI

This seductive recessed fitting was probably inspired by an addiction to sweet treats. The perfect circle makes the lamp both playful and minimalist at the same time. Downut blends in perfectly with your architecture. The inner disc can easily be given the same colour or texture as the rest of the environment. Available with a diameter of 356 mm, or 278 mm for the Mini-downut. Combine with RGB LEDs for a colourful touch.

Art. Nr. 11030109

SPECIFICATIONS



Lamp	1x T16-R 2Gx13 55W
Gear / Transfo	gear incl., electronic
Cut-out size	ø 356 h 120
Weight	3.2kg
Min. Distance	0.5 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
CRI	85
Lumen	953 Lm
Efficacy	16 Lm/W
UGR	19

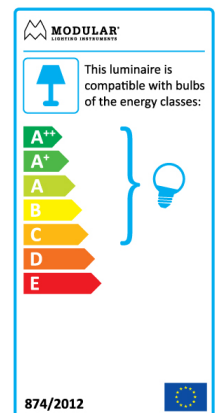

white struc

11030109



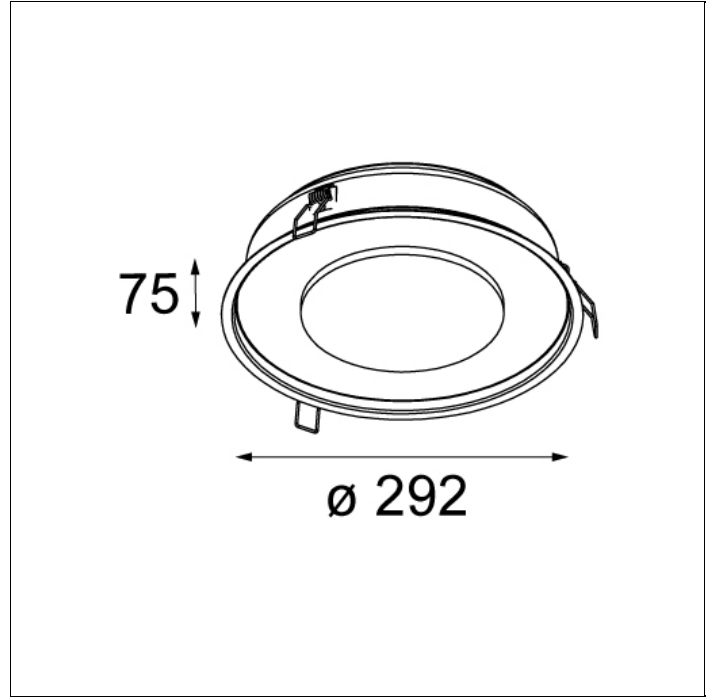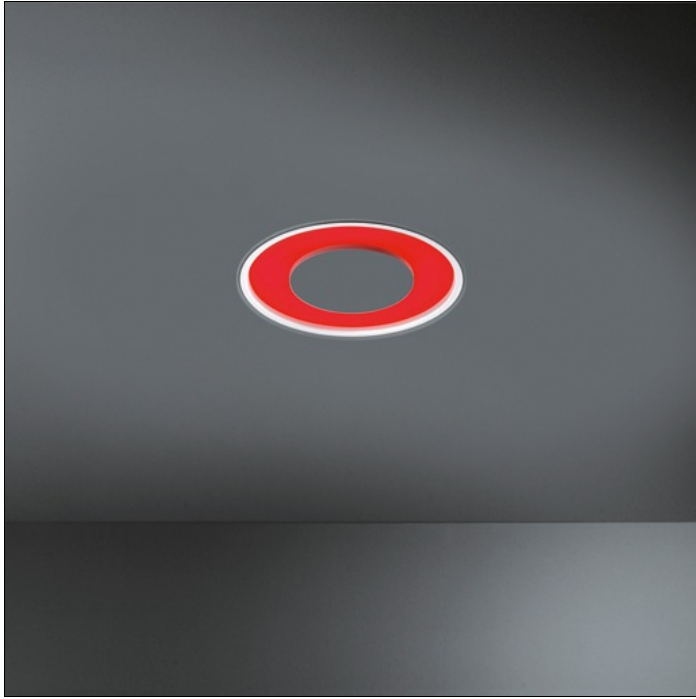

DOWNUT FLANGE 292 LED GE


This seductive recessed fitting was probably inspired by an addiction to sweet treats. The perfect circle makes the lamp both playful and minimalist at the same time. Downnut blends in perfectly with your architecture. The inner disc can easily be given the same colour or texture as the rest of the environment. Available with a diameter of 356 mm, or 278 mm for the Mini-downnut. Combine with RGB LEDs for a colourful touch.

Art. Nr. 11038209

SPECIFICATIONS

Lamp	60CMx LED-strip RGB 4.32W
Gear / Transfo	LED gear not incl.
Cut-out size	ø 278 h 85
Weight	1.5kg
Min. Distance	0.1 m
Power supply	12V
IP	IP20
Glow Wire Test	960°
Remark	! can be used with 'to be touched' control system


MODULAR
LIGHTING INSTRUMENTS

 This luminaire contains built-in LED lamps.


A++
A+
A
B
C
D
E


} LED

The lamps cannot be changed in the luminaire.

874/2012 

	RGB / CRI +
white struc	11038209



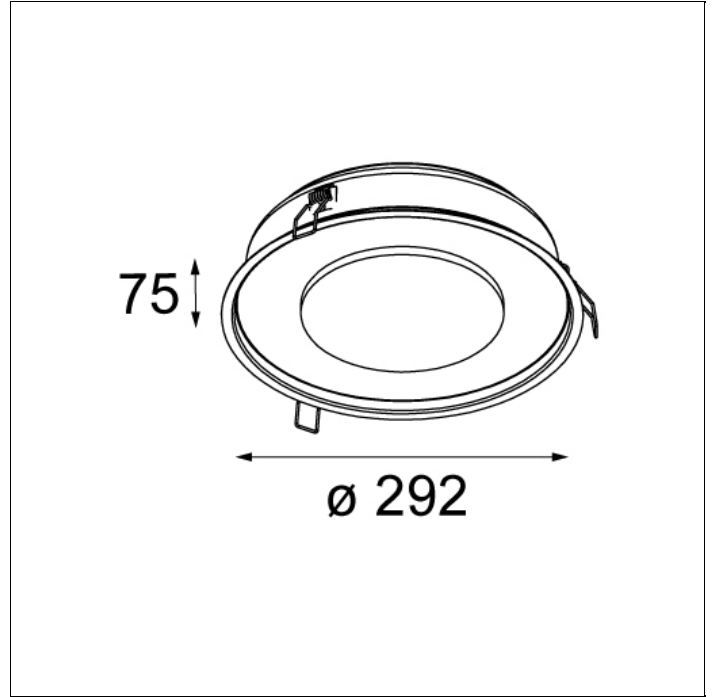


DOWNUT FLANGE 292 TL5C GI

This seductive recessed fitting was probably inspired by an addiction to sweet treats. The perfect circle makes the lamp both playful and minimalist at the same time. Downnut blends in perfectly with your architecture. The inner disc can easily be given the same colour or texture as the rest of the environment. Available with a diameter of 356 mm, or 278 mm for the Mini-downnut. Combine with RGB LEDs for a colourful touch.

Art. Nr. 11030709

SPECIFICATIONS

Lamp	1x T16-R 2Gx13 22W
Gear / Transfo	gear incl., electronic
Cut-out size	ø 278 h 85
Weight	1.5kg
Min. Distance	0.5 m
Power supply	230V
IP	IP20
Glow Wire Test	960°
CRI	85
Lumen	790 Lm
Efficacy	32 Lm/W
UGR	20

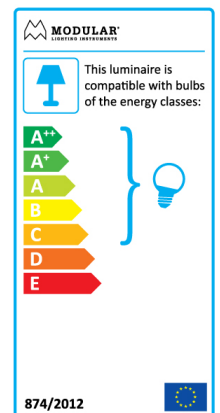

white struc

11030709

