
JULIEN SQUARE





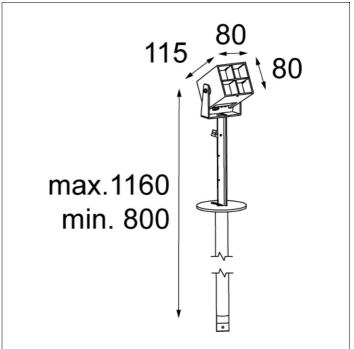

JULIEN SQUARE IP54 LED GE

Every garden has a feature that deserves to be in the spotlight. So why not rely on glamorous lighting to do so? Julien is perfect for the task at hand with an IP rate of 54, its adjustability in length and the inclination of its head. Julien with a ground stake is suited for softer grounds and Julien foot, with its fixed mounting plate can be mounted on a wall or hard surfaces.

Lamp 1x high power LED 3.5W Gear / Transfo Weight 2.5kg Min. Distance 0.1 m Power supply 350mA IP Glow Wire Test 960° Source lifetime 22000 hrs CRI 85 Lumen 54 Lm Efficacy 15 Lm/W UGR 15 This luminaire contains built-in LED lamps. This luminaire contains built-in LED lamps. LE A B C C C C C C C C C C C C C C C C C C	
Gear / Transfo Weight 2.5kg Min. Distance 0.1 m Power supply 350mA IP Glow Wire Test 960° Source lifetime 22000 hrs CRI 85 Lumen 54 Lm Efficacy 15 Lm/W UGR 15 This luminaire contains built-in LED lamps. ATD LED lamps. LE D LED LED LED LED LED LED LED LED LED	
Weight 2.5kg Min. Distance 0.1 m Power supply 350mA IP Glow Wire Test 960° Source lifetime 22000 hrs CRI 85 Lumen 54 Lm Efficacy 15 Lm/W U GR 15 This luminaire contains built-in LED lamps. A** A** A** A** A** B C D D	
Min. Distance 0.1 m Power supply 350mA IP Glow Wire Test 960° Source lifetime 22000 hrs CRI 85 Lumen 54 Lm Efficacy 15 Lm/W UGR 15 This luminaire contains built-in LED lamps. L	
Power supply 350mA IP Glow Wire Test 960° Source lifetime 22000 hrs CRI 85 Lumen 54 Lm Efficacy 15 Lm/W UGR 15 This laminaire contains built-in LED lamps. LE A LE	
IP Glow Wire Test 960° Source lifetime 22000 hrs CRI 85 Lumen 54 Lm Efficacy 15 Lm/W UGR 15 This luminaire contains built-in LED lamps. AT A B B C D B C C D C C C C C C C C C C C C	
Glow Wire Test 960° Source lifetime 22000 hrs CRI 85 Lumen 54 Lm Efficacy 15 Lm/W UGR 15 This label is available in other languages: http://supermodular.com/assets/TYPE2.pdf This Luminaire contains built-in LED lamps. A** A** A** A** A** A** A** A	
Source lifetime 22000 hrs CRI 85 Lumen 54 Lm Efficacy 15 Lm/W UGR 15 This label is available in other languages: http://supermodular.com/assets/TYPE2.pdf This Lamps. L E A B C D B D B D D B D D D D D D D D D D D	
CRI 85 Lumen 54 Lm Efficacy 15 Lm/W UGR 15 This label is available in other languages: http://supermodular.com/assets/TYPE2.pdf This Luminaire contains built-in LED lamps. AT A	
Lumen 54 Lm Efficacy 15 Lm/W U GR 15 This label is available in other languages: http://supermodular.com/assets/TYPE2.pdf This luminaire contains built-in LED lamps. A** A** A** B B C D	
Efficacy 15 Lm/W UGR 15 This label is available in other languages: http://supermodular.com/assets/TYPE2.pdf This luminaire contains built-in LED lamps. LED lamps. LED lamps. LED lamps. LED lamps.	
This label is available in other languages: http://supermodular.com/assets/TYPE2.pdf This luminaire contains built-in LED lamps. AT A B B C D	
This label is available in other languages: http://supermodular.com/assets/TYPE2.pdf This luminaire contains built-in LED lamps. LED lamps. LED lamps. LED lamps. LED lamps.	
This luminaire contains built-in LED lamps. ATA A B B C D	
The lamps cannot be changed in the luminaire.	

	WARM WHITE 2700K / CRI 85+
	WIDE FLOOD 70°
black struc	10732108
khaki	10732122





Art. Nr. 10732108








JULIEN SQUARE







Art. Nr. 10732008

JULIEN SQUARE FOOT IP54 LED GI

Every garden has a feature that deserves to be in the spotlight. So why not rely on glamorous lighting to do so? Julien is perfect for the task at hand with an IP rate of 54, its adjustability in length and the inclination of its head. Julien with a ground stake is suited for softer grounds and Julien foot, with its fixed mounting plate can be mounted on a wall or hard surfaces.

1x high power LED 3.5W 1.3kg 0.1 m 230V 960° 22000 hrs 85
0.1 m 230V 960° 22000 hrs
0.1 m 230V 960° 22000 hrs
230V 960° 22000 hrs
960° 22000 hrs
22000 hrs
22000 hrs
85
54 Lm
9 Lm/W
15
This label is available in other languages: http://supermodular.com/assets/TYPE2.pdf

eco 🖶 🐴

	WARM WHITE 2700K / CRI 85+
	WIDE FLOOD 70°
black struc	10732008
khaki	10732022

