


PH Artichoke Glass

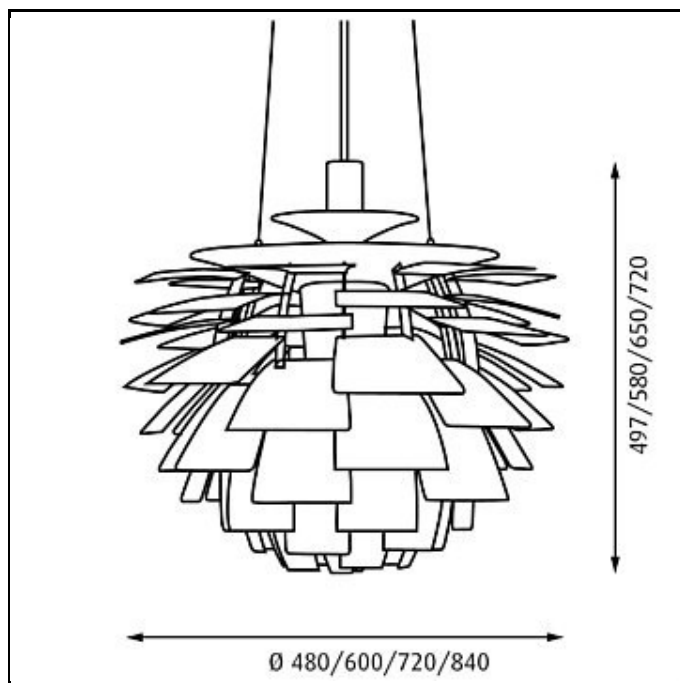

Design Poul Henningsen

Concept The fixture provides 100% glare-free light. The 72 precisely positioned leaves form 12 unique rows of six leaves each. They illuminate the fixture, as well as emit diffused light with a unique pattern. Reflection from the light source is diffused in the sandblasted lower surfaces, and this light is reflected decoratively in the top surfaces, giving the fixture a unique glow. The surface treatment on the glass leaves eliminates direct glare.

Finish Clear glass, sandblasted.

Material Leaves: Clear glass, sandblasted. Top shade: High lustre chrome plated or white, spun brass. Frame: High lustre chrome plated, laser cut brass. Suspension: High lustre chrome plated, spun aluminium.

Mounting Suspension type: Cable 3x0,75mm² & wire. Canopy: Yes. Cable length: 4m.

Weight Max. 22kg.

Class Ingress protection IP20. Electric shock protection I w. ground.

Product Code	Dimensions	Light source	Finish	Cable type
PHA-P-G	Ø 480	1x200W E27	CLEAR GLASS SANDBL.	WHT TEX/WIRE
	Ø 600	1x230W HALOLUX E27		
	Ø 720	1x35W HIT Clear G8.5 HF		
	Ø 840	1x500W E40		
		1x70W HIT G12 HF		

Specification notes

150W HIT is only available in Ø 720 or Ø 840. 500W E40 and 70W HIT is only available in Ø 600. Ø 720 or Ø 840. 200W E27 is only available in Ø 480. The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.