


PH Artichoke

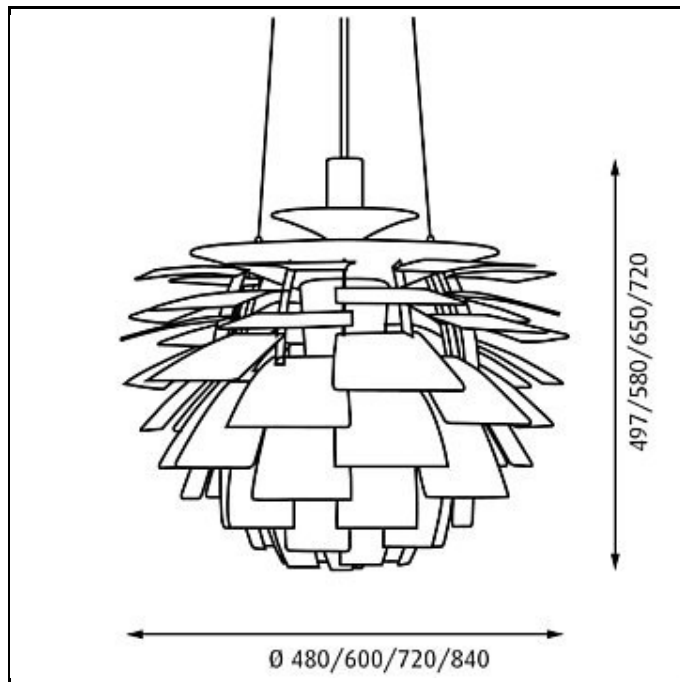

Design Poul Henningsen

Concept The fixture provides 100% glare-free light. The 72 precisely positioned leaves form 12 unique rows of six leaves each. They illuminate the fixture as well as emitting diffused light with a unique pattern. The fixture provides decorative and comfortable lighting.

Finish Copper or stainless steel, brushed and coated. White, wet painted.

Material Leaves: Punched copper, laser cut stainless steel or punched steel. Top shade: White, spun steel. Frame: High lustre chrome plated, laser cut steel. Suspension: High lustre chrome plated, spun aluminium.

Mounting Suspension type: Cable 3x0,75mm² & wire. Canopy: Yes. Cable length: 4m.

Weight Max. 22.5kg.

Class Ingress protection IP20. Electric shock protection I w. ground.

Product Code	Dimensions	Light source	Finish	Cable type
PHA-P	Ø 480	1x150W HIT G12 HF	COPPER	WHT TEX/WIRE
	Ø 600	1x200W E27	STAINL STEEL	
	Ø 720	1x230W HALOLUX E27	WHT	
	Ø 840	1x500W E40		
		1x70W HIT G12 HF		

Specification notes

150W HIT is only available in Ø 720 or Ø 840. 500W E40 and 70W HIT is only available in Ø 600, Ø 720 or Ø 840. 200W E27 is only available in Ø 480. The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On www.louispoulsen.com we update a list of recommendable light sources.