


# Tolbod 155 Wall

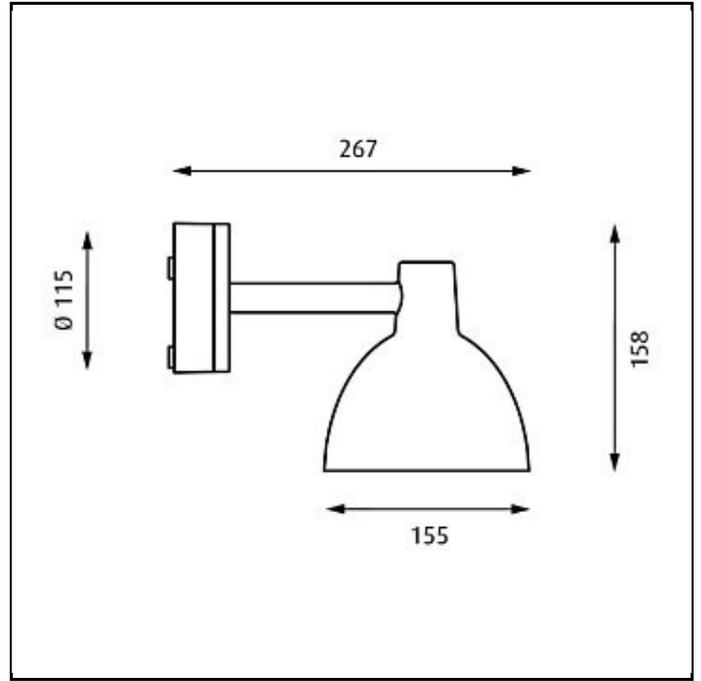

- Design** Louis Poulsen Lighting A/S
- Concept** The light is directed 100% downwards, and the shade has a matt white painted inside which emits a soft, diffused, comfortable light. The fixture fulfils full cut-off criteria.
- Finish** Aluminium coloured with textured surface or black with textured surface, powder coated.
- Material** Fixture head: Chilled casting aluminium. Shield: Laser cut acrylic satine. Wall box: Die cast aluminium. Arm: Chilled casting aluminium.
- Mounting** Terminal block: 1x3x2.5mm<sup>2</sup>. Cable entries: 2x bottom + 3x rear entries for Ø 10-14.5mm cable. Looping: Approved, max. 3x1,5mm<sup>2</sup>.
- Weight** Max. 1.5kg.
- Class** Ingress protection IP44. Electric shock protection I w. ground. IK05.

Product Code	Light source	Finish
TOL-155-W	1x40W E14	ALU COL TEXT BLK TEXT

**Specification notes**

The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On [www.louispoulsen.com](http://www.louispoulsen.com) we update a list of recommendable light sources.